
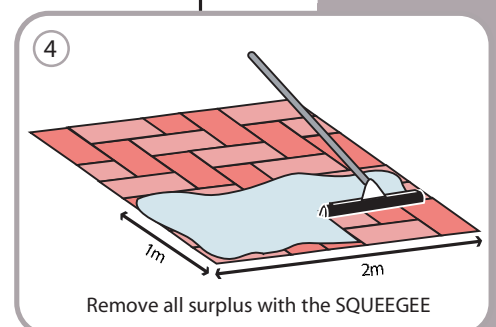
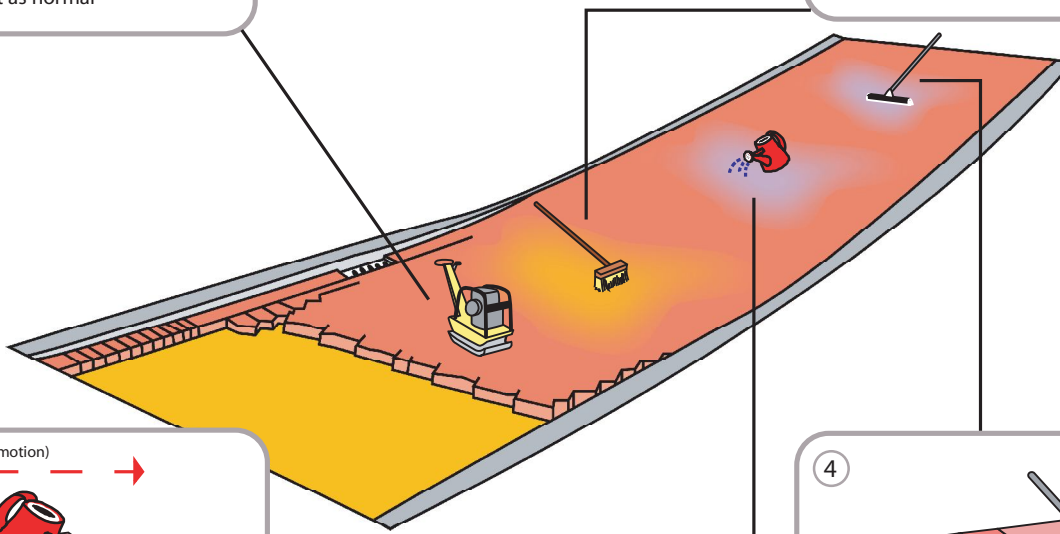
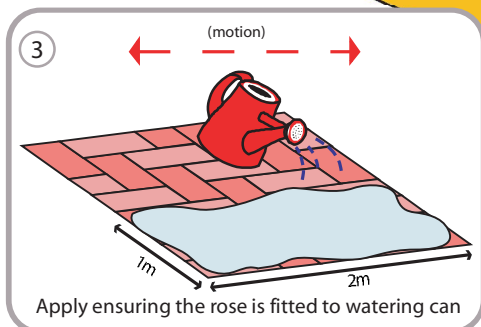
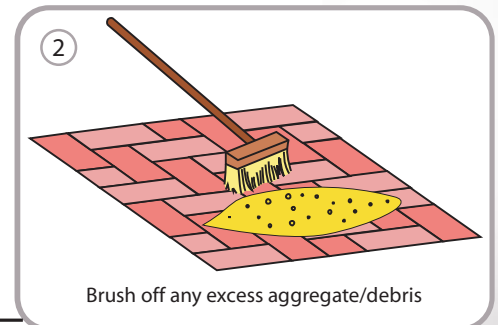


RESIBLOCK

Sealing, Stabilising, Protecting Paving

ENVIROFIX APPLICATION SUMMARY

- 1 Ensure that steps 1,2,3 & 4 are completed the same day.
- 2 Following installation of the jointing aggregate, sweep the area thoroughly to remove all debris. Ensure that the jointing aggregate has been fully removed from the chamfer. Ensure both aggregate and paver are completely dry.
- 3 RESIBLOCK ENVIROFIX is not much thicker than water and is easily applied utilising a watering can with a rose attached. Accurate spread rates are essential e.g. 100 x 200mm Concrete Block Permeable Paving (CBPP) 1.8m²/litre. For best results fill your watering can with RESIBLOCK ENVIROFIX, pour out 1 litre evenly over 1.8m², being a manageable amount to squeegee.
- 4 Having applied RESIBLOCK ENVIROFIX to the pavers, squeegee off the surface starting at the top and always working towards you. Pull RESIBLOCK ENVIROFIX off the surface, it will pool in the chamfers/joints and will wash through the jointing aggregate.

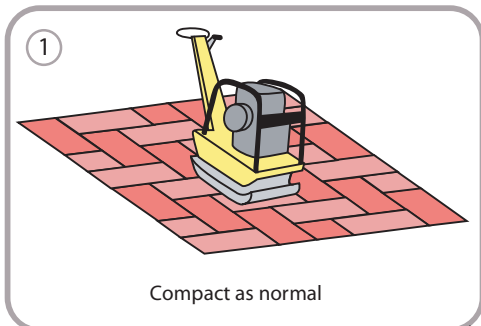

See reverse for further summary notes

ENVIROFIX

APPLICATION SUMMARY

On new projects, ensure paving is sealed with RESIBLOCK ENVIROFIX simultaneously with pavement construction, on a daily basis. **DO NOT WAIT** until project is complete.

1. Make sure the surface and jointing aggregate are **THOROUGHLY DRY** and free from dirt/debris.
2. Stir contents well.
3. Ensure that RESIBLOCK ENVIROFIX is applied when there is no risk of rain within the next 24 hours.
4. Do not apply in extremes of temperature (below 5°C or above 30°C).
5. Ensure paving is thoroughly swept and that no jointing aggregate remains in the chamfers of the pavers.
6. Apply to surface using a watering can (with the rose attached) and remove **ALL** surplus with a RESIBLOCK SQUEEGEE.
7. Accurate application rates are essential to ensure full joint stabilisation e.g. 100 x 200mm CBPP 1.8m²/litre. For other dimensions contact Resiblock's Technical Department.
8. Avoid walking on the sealed area for 2 - 4 hours after application and do not drive motor vehicles on the surface for approximately 72 hours.

FOR FURTHER INFORMATION OR TECHNICAL ASSISTANCE CONTACT RESIBLOCK LTD

Resiblock House
Archers Fields Close
Basildon

Essex, SS13 1DW

Tel: (+44) 01268 273344 Fax: (+44) 01268 273355

email: technical@resiblock.com

www.resiblock.com



www.paving.org

Associate Members Of Interpave Ltd



Sponsors of
The Institute of Highway Incorporated Engineers

Please note this summary is offered as a general guide only and does not replace the current published Application Guidelines which must be read prior to application together with the current Material Safety Data Sheet.